

Pivot3 Surveillance Series

CRITICAL IT INFRASTRUCTURE FOR SURVEILLANCE, SECURITY AND IOT

LARGE-SCALE
2U SURVEILLANCE APPLIANCE

V5-2000
2U SURVEILLANCE APPLIANCE

V5-2000s
2U STORAGE APPLIANCE

V5-6400
VIRTUAL SOC APPLIANCE

UP TO
90%
STORAGE
EFFICIENCY


NO
DOWNTIME

NO
DATA LOSS



All-in-one infrastructure solutions, designed for video surveillance.

Pivot3 enables organizations to consolidate data storage, video management, access control and other related security applications onto a single, all-in-one IT infrastructure that delivers the performance, resiliency and scalability required by modern surveillance technologies. This new approach, called hyperconverged infrastructure (HCI), combines server and storage resources into modular, scalable appliances that provide advanced resiliency capabilities so organizations can store video data without loss, protect their data during failure events, and ensure their data is always available when and where it is needed. And with its simple, single-pane-of-glass management, designed for ease of use by non-technical personnel, allowing them to focus their time on protecting your business.

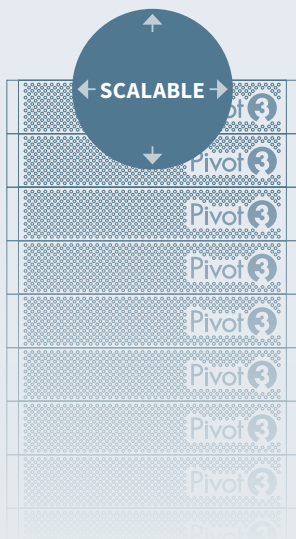

Maximize Uptime

Ensure video data, applications and integrated systems remain available and accessible, even in the event that disks or an HCI appliance is unavailable with Pivot3's data protection and failover technology. Storage will remain online, virtual servers automatically restart, and recorded video will remain protected and accessible, all without the need for redundant software, licensing or hardware.

Simplify Management

Managing separate storage, server and management interfaces for video surveillance is complex and time consuming. With Pivot3, servers and storage are virtualized into a single surveillance infrastructure designed to run video management, access control, analytics and related applications. A simple, centralized user-interface and automated administrative functions means no specialized skills are needed to manage this enterprise-class infrastructure.

Scale On-Demand

Deploy Pivot3 with only the server and storage resources you currently need, minimizing cost and overprovisioning. As camera counts grow and new technologies are integrated, scale storage, compute and bandwidth linearly, and non-disruptively, as each additional appliance is added.

Eliminate Frame Loss

Purpose-built to handle the unique requirements of modern video surveillance workloads, Pivot3 eliminates frame drops to ensure video loss and image degradation never occur. Every HCI appliance's capacity and performance resources are aggregated and available to every camera, so you can be confident that cameras will get the sustained performance they require, even in the event of hardware failure.

Pivot3 Surveillance Infrastructure Solutions

NEVER DOWNTIME OR DATA LOSS

- Patented Erasure Coding
- 5 drives or full-node data protection
- Automated server failover
- No single points of failure

SUSTAINED VIDEO INTEGRITY

- Solid-state write cache
- Pooled cache and disk resources
- Parallel active/active storage controllers
- Virtual sparing for fast disk rebuilds

FULLY-FUNCTIONAL CLIENT ACCESS*





- Up to 180 1080p, 30fps video streams
- Any device – phone, tablet, zero-client, workstation, video wall
- Any VMS, plus integrated systems
- Secure communications
- Lower bandwidth

PAY AS YOU GROW

- Scale compute, capacity and bandwidth with a single appliance
- Grow capacity with storage-only appliances
- Online and video data is auto load balanced
- Storage efficiency improves with scale

* Virtual SOC Appliance Only (V5-6400)

PIVOT3 SURVEILLANCE SERIES APPLIANCES

2U Surveillance – Large-Scale	2U Surveillance	2U Storage-only	2U Virtual SOC
			
Model Name			
V5-2000	V5-2000	V5-2000s	V5-6400
HDD Capacity (TB)			
D2: 288, 336 S2: 288, 336	L2: 12, 24, 48, 96, 120, 144, 168 D2: 16, 32, 64, 128, 160, 192, 224	L2: 12, 24, 48, 96, 120, 144, 168 D2: 16, 32, 64, 128, 160, 192, 224, 288, 336 S2: 288, 336	-
SSD Capacity (TB)			
-	-	-	1.92TB or 3.84TB
SSD Caching			
Yes	Yes	Yes	No
Max Appliances per vPG*			
12	12	12	16
Max Storage per vPG			
4.0PB	2.7PB	4.0PB	60.8TB
Server Virtualization			
VMware Foundation	VMware Foundation	-	VMware ESXi
Virtual Clients			
-	-	-	VMware Horizon
Software Defined SAN			
Yes	Yes	Yes	Yes
Optional GPU			
-	L2: Up to 2x NVIDIA T4	-	Up to 5x NVIDIA T4
Processors / Cores			
2x 12-Core Intel Xeon 4116 or 2x 20-Core Intel Xeon 6138 or 2x 12-Core Intel Xeon 4214 or 2x 20-Core Intel Xeon 6230	1x 12-Core Intel Xeon 4116 or 2x 12-Core Intel Xeon 4116 or 2x 20-Core Intel Xeon 6138 or 1x 12-Core Intel Xeon 4214 or 2x 12-Core Intel Xeon 4214 or 2x 20-Core Intel Xeon 6230	L2 & D2: 1x 6-Core Intel 3104 or 1x 6-Core Intel 3204 S2 & D2: 2x 6-Core Intel 3104 or 2x 6-Core Intel 3204	2 x 12 Core Intel 4214 2 x 20 Core Intel 6230 2 x 24 Core Intel 6252
RAM (GB)			
64, 96, 128	48, 96	L2: 32 D2 & S2: 32 or 64	64, 96, 128, 160, 192GB
Networking			
6x 10GbE (SFP+ or RJ45)	6x 10GbE (SFP+ or RJ45)	4x 10GbE (SFP+ or RJ45)	6x 10GbE (SFP+ or RJ45)

* A Virtual Performance Group (vPG) is a logical, scale-out construct that includes both virtualized servers and storage.

For detailed technical specifications, visit Resources.Pivot3.com

© 2020 Pivot3, Inc. This document is for informational purposes only. Pivot3 reserves the right to make changes without further notice to any products herein. The content provided is as is and without express or implied warranties of any kind.